
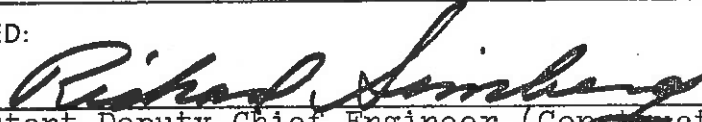


TO: ALL REGIONAL DIRECTORS	 ENGINEERING INSTRUCTION NEW YORK STATE DEPARTMENT OF TRANSPORTATION
Distribution:	SUBJECT: INSTALLATION DETAILS FOR CORRUGATED METAL AND CONCRETE PIPES Subject Code: 7.27-2 67-19, 68-194
APPROVED:  Assistant Deputy Chief Engineer (Construction)	Code: <u>EI-72-38</u> Date: <u>4/7/72</u> Supersedes:
<input checked="" type="checkbox"/> Main Office <input checked="" type="checkbox"/> Regions <input type="checkbox"/> Special	

Reference is made to the requirement on Standard Sheets 67-19 and 68-19A, that:

"Method C-2 shall be used only when indicated on the plans or when approved by the Deputy Chief Engineer (Highways)."

Approval by the Deputy Chief Engineer (Construction) for use of installation method C-2, will be required only when conditions are such that Method C-2 must be used at additional cost in lieu of Method C-1. The Regional Director may give written approval to contractor's requests to use Method C-2 at specific contract locations upon agreement by the contractor that no additional payment will be made, beyond that which would have been incurred under Method C-1.

Such approvals should be given after it has been ascertained that the substitution will have no adverse affects upon proper drainage and protection against erosion during construction.

RNS:LG